

Preliminary & Field Evaluation Form

www.SepticResource.com vers 12.4

Owner Information			
Date	<u>10/3/2018</u>	Sec / Twp / Rng	<u>S-23, T-46, R-27</u>
Parcel ID	<u>07-0-045001</u>	LUG (county, city, township)	<u>Aitkin Co.</u>
Property Owner:	<u>Steve Smith</u>	Owners address (if different)	
Property Address:	<u>41714 Diamond Lake St. Aitkin MN 56431</u>	<u>11001 Sumpter Ave. N.</u>	
City / State / Zip:		<u>Champlin MN 55316</u>	

Flow Information and Waste Type / Strength			
Estimated Design flow	<u>300</u>	Anticipated Waste strength	<input type="checkbox"/> Hi Strength <input checked="" type="checkbox"/> Domestic
Comments: <u>Shop with bathroom</u>		Any Non-Domestic Waste	<input type="checkbox"/> Yes (class V) <input checked="" type="checkbox"/> No
		Sewage ejector/grinder pump	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Water softener	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Garbage Disposal	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Daycare / In home business	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

Site Information					
Existing & proposed lot improvements located (see site map)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Well casing depth	Proposed deep well	
Easements on lot located (see site map)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	Drainfield w/in 100' of residential well	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Property lines determined (see site map) By Others	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Site w/in 200' of transient noncommunity water supply (TNCWS)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Req'd setbacks determined (see site map)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Site w/in an inner wellhead mgmt zone (CWS/NTNCWS)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Utilities located & identified (gopher state one call)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	Buried water supply pipe w/in 50' of system	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Access for system maintenance (shown on site map)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Site located in Shoreland (w/in 1000' of lake, 300' of river)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Soil treatment area protected	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Site map prepared with previous items included	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Construction related issues	<div style="border-bottom: 1px solid black; height: 15px; margin-bottom: 5px;"></div> <div style="border-bottom: 1px solid black; height: 15px; margin-bottom: 5px;"></div>				

Soil Information

		Evidence of site:	
		Cut	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Filled	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Compacted	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		Disturbed	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Original soils	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Soil logs completed and attached	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Perk test completed and attached (if applicable) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Soil loading rate (gpd/ft ²)	<u>0.60</u>		Percolation rate (if applicable) _____
Depth/elev to SHWT	<u>20"</u>		Flooding or run-on potential (comments) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Depth to system bottom maximum (or elev minimum)	<u>(+ 18")</u>		Flood elevation (if applicable) _____
Depth/elev to standing water (if applicable)	_____		Elevation of ordinary high water level (if applicable) _____
Depth/elev to bedrock (if applicable)	_____		Floodplain designation and elev - 100 yr/10 yr (if applicable) _____
Soil Survey information determined (see attachment)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Differences between soil survey and field evaluation (if applicable)	_____ _____		

I hereby certify this evaluation was completed in accordance with MN 7080 and any local req's.



 Designer Signature

Brummer Septic LLC.

 Company

L-1347

 License #

Soil Observation Log

www.SepticResource.com vers 12.4

Owner Information	
Property Owner / project: <u>Steve Smith</u>	Date <u>10/3/2018</u>
Property Address / PID: <u>41714 Diamond Lake St. Aitkin MN</u>	

Soil Survey Information	
<input type="checkbox"/> refer to attached soil survey	
Parent mat'l's:	<input checked="" type="checkbox"/> Till <input checked="" type="checkbox"/> Outwash <input type="checkbox"/> Lacustrine <input type="checkbox"/> Alluvium <input type="checkbox"/> Organic <input type="checkbox"/> Bedrock
landscape position:	<input type="checkbox"/> Summit <input type="checkbox"/> Shoulder <input checked="" type="checkbox"/> Side slope <input type="checkbox"/> Toe slope
soil survey map units:	<u>928D & 928C</u> slope <u>2</u> % direction- <u>North</u>

Soil Log #1							
<input checked="" type="checkbox"/> Boring <input type="checkbox"/> Pit		Elevation <u>98.1'</u>		Depth to SHWT <u>36"</u>			
Depth (in)	Texture	fragment %	matrix color	redox color	consistence	grade	shape
0 - 6	Topsoil Loam	<35	10YR3/2		Loose	Loose	Granular
6 - 26	Loam	<35	10YR4/4		Friable	Loose	Granular
26-36	Sandy Loam	<35	10YR4/4		Loose	Loose	Granular
36	Silt Loam	<35	10YR5/4	7.5YR5/6	Loose	Loose	Granular
		<35			Loose	Loose	Granular
Comments:							

41714 Diamond Lake St. Aitkin MN 56431

Soil Log #2

<input checked="" type="checkbox"/> Boring <input type="checkbox"/> Pit		Elevation <u>98.1'</u>		Depth to SHWT <u>20"</u>			
Depth (in)	Texture	fragment %	matrix color	redox color	consistence	grade	shape
0 - 6	Topsoil Loam	<35	10YR3/2		Loose	Loose	Granular
6 - 20	Loam	<35	10YR5/4		Loose	Loose	Granular
20 - 28	Silt Loam	<35	10YR5/4	7.5YR4/4 & 10YR6/2	Friable	Weak	Blocky
		<35			Loose	Loose	Granular
		<35			Loose	Loose	Granular

41714 Diamond Lake St. Aitkin MN 56431

Soil Log #3

<input type="checkbox"/> Boring <input type="checkbox"/> Pit		Elevation _____		Depth to SHWT _____			
Depth (in)	Texture	fragment %	matrix color	redox color	consistence	grade	shape
		<35 35 - 50 >50			loose friable firm rigid	loose weak moderate strong	single grain granular blocky prismatic platy massive
		<35 35 - 50 >50			loose friable firm rigid	loose weak moderate strong	single grain granular blocky prismatic platy massive
		<35 35 - 50 >50			loose friable firm rigid	loose weak moderate strong	single grain granular blocky prismatic platy massive
		<35 35 - 50 >50			loose friable firm rigid	loose weak moderate strong	single grain granular blocky prismatic platy massive
		<35 35 - 50 >50			loose friable firm rigid	loose weak moderate strong	single grain granular blocky prismatic platy massive

I hereby certify this work was completed in accordance with MN 7080 and any local req's.


 Designer Signature

Brummer Septic LLC.
 Company

L-1347
 License #

Mound Design - Aitkin county

Property Owner: Steve Smith

Date: 10/3/2018

Site Address: 41714 Diamond Lake St. Aitkin MN 56431


PID: 07-0-045001

Comments: Shop with bathroom

Instructions: = enter data = adjust if desired = computer calculated - DO NOT CHANGE!

- 1) bedroom Type Residential System
- 2) GPD design flow
- 3) Garbage disposal or pumped to septic Install Jacobson 1650 compartment tank
- 4) Gal Septic tank (code minimum) Gal Septic tank (design size / LUG req'd)
Tank options: Effluent filter & alarm req'd
- 5) GPD/ft² mound sand loading rate contour loading rate of req's a min ft. long rockbed
- 6) ft rockbed width ft rockbed length
- 7) ft lateral spacing ft perforation spacing (maximum of 3 for both)
 manifold connection
- 8) laterals feet long perfs / lateral perfs total
(1/2 a perf means the first perf starts at the middle feed manifold)
- 9) inch perfs at feet residual head gives gpm flow rate per perforation
for this perf size & spacing, & pipe size on line 12, max perfs/lateral = , line #8 must be less --> OK
- 10) doses per day (4 minimum)
- 11) gallons per dose (treatment volume)
- 12) inch diameter laterals must be used to meet "4x pipe volume" requirement 1.50 5x
- 13) feet of inch supply line leads to gallons of drainback volume 2.00 3x
(Tip: "top feed" manifold to control the drainback)
- 14) gallons TOTAL pump out volume (treatment + drainback)
- 15) feet vertical lift from pump to mound laterals, leads to a:
- 16) GPM @ feet of head, Pump requirement (note: >50gpm may require an extra 3-6' of head)
- 17) gal Dose tank (code minimum) gal Dose tank (design size / LUG req'd) at gpi
leads to a
- 18) inch swing on Demand float, or timed dosing of min ON (confirm pump rate with drawdown
(this delivers Average flow, =70% of Peak design flow) hrs OFF test and adjust as necessary)
- 19) inches from bottom of tank to "Pump OFF" float
- 20) inches from bottom of tank to "Pump ON" float, or inches to "Timer ON" float if time dosed
- 21) inches from bottom of tank to "Hi Level" float, or inches to "Hi Level" float if time dosed
- 22) gallons reserve capacity (after High Level Alarm is activated)

- 23) gpd/ft² Absorption area Soil Loading Rate, which gives a mound ratio of (minimum)
 (this must match the soil boring log) desired mound ratio
- 24) percent site slope (0-20% range) (% downslope site slope, if different than upslope)
- 25) inches, or ft. to Redox or other limiting condition (need at least 12" to be a Type I)
 Treatment zone contains inches of 0% soil credit, and inches of 50% soil credit. Giving a:
- 26) inch, or ft. Sand Lift Mound **CRITICAL FOR FUTURE CERTIFICATIONS!!!**
- 27) ft. base absorption width (with sand beyond rockbed as follows):
 greater of: absorption width OR sand slope
- 28) ft. upslope and sideslope sand upslope
 ft. Downslope sand down slope
- Individual slope ratios give BERM widths (topsoil beyond rockbed) of:
- 29) upslope ratio ft. upslope berm
- 30) sideslope ft. sideslope berms
- 31) downslope ft. downslope berm
- 32) Overall Dimensions: ft. wide by ft. long Rock bed
 ft. wide by ft. long Mound footprint

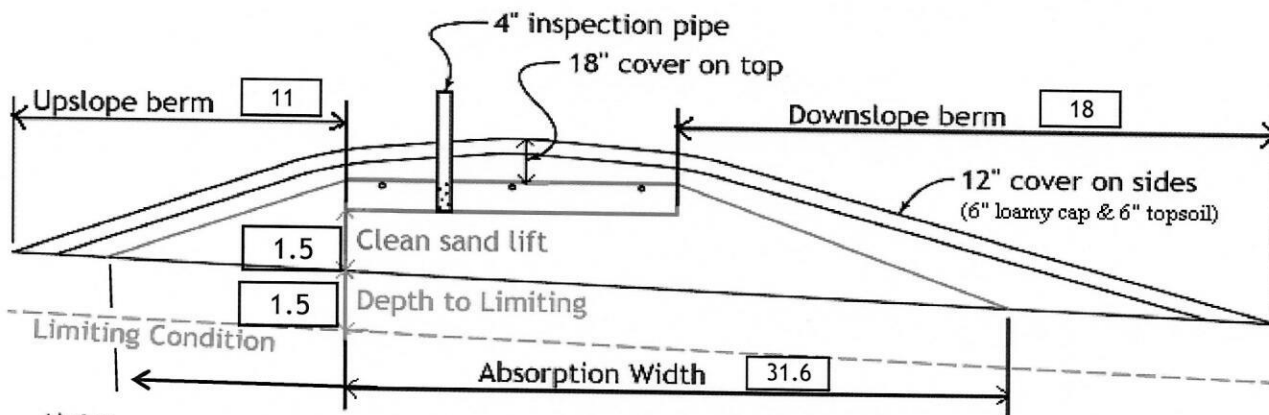

Note:

For 0 to 1% slopes, *Absorption Width* is measured from the *Bed* equally in both directions.
 For slopes >1%, *Absorption Width* is measured downhill from the upslope edge of the *Bed*.

- 33) Rock Bed: ft. by ft. by inches under pipe, plus 20% gives yd³ or *1.4= ton
- 34) Mound Sand: (note: volume is based on 3:1/4:1 slope from top of rockbed, Exchange sand for loamy cap if desired)
 up + downslope + ends + under rock = yd³ or *1.4= ton
 plus 20%
- 35) Loamy Cap: ft. by ft. 6" deep, plus 20% gives yd³ or *1.4= ton
- 36) Topsoil: ft. by ft. 6" deep, plus 20% gives yd³ or *1.4= ton

I hereby certify that I have completed this work in accordance with all applicable ordinances, rules and laws.


 Designer Signature

Brummer Septic LLC.
 Company

L-1347
 License#

10/3/2018
 Date

INSPECTOR CHECKLIST - mound

41/14 Diamond Lake St. AITKIN MN 56431

- WELL setbacks: 20' to pressure tested sewer line (5 psi for 15 min)
50' to everything 100' to dispersal area with shallow well
- PROPERTY LINES setback: 10' to everything
- Road setback: platted: 10' prop line. Metes & bounds: out of road easement, or outer ditch.
- LAKE / BLUFF setback: 20' for bluff. Lakes: GD ____, RD ____, NE _____. Protected wetland ____.
- Building setbacks: 10' for everything, 20' for dispersal area.
- WATER LINE under pressure set 10' to bed, tank & sewer line. (else sewer line > 12" below, else ok w/pvc)

- Sewer line & baffle connection (no 90's, 3' between 45's, slope min 1" in 8', max 2" in 8')
(no depth req's, clean out every 100', Sch 40 pipe)

- Septic tank and risers (water tight, insulated, proper depth, existing verified by pumping)
mfg _____ 1120 gallons Effluent filter & alarm req'd _____

- Riser over outlet, riser over inlet or center, and 6"+ inspection pipe over any remaining baffles.
yes _____ effluent filter & alarm
- Dose tank risers and piping (water tight, insulated, proper depth, drainback)
mfg _____ 533 gallons

- dose pump _____ 18 gpm 18 head VERIFY PUMP CURVE 2.8 min ON 5.1 hr OFF

- float setting drop 3.9 inches at 12.7 gpi "DESIGNED" 3.0 inches approx float tether length
50.0 gal dose divided by _____ gpi "INSTALLED" = _____ inches float drop (field corrected)
LABEL pump requirements and drawdown on riser or panel

- Cam lock reachable from grade - 30" max. J-hook weep hole. Supply line access (no hard 90's)
2.0 inch supply pipe: Sch40, sloped 1/8"+, supported by 4" sch40 sleeve or compacted, and buried 6"+.
splice box / control panel / electrical connections
- flow measurement: CT, ETM, time dosed, home water meter
- mound absorption area rough up
- mound rock dimensions 10.0 X 25.0
- Sand lift depth 18 inches. (Jar test : 2" sand leaves < 1/8" silt after 30 min)

- Absorption Sand beyond rock 8.1 upslope 13.5 downslope

- Bermed topsoil beyond rockbed 11 upslope 16 sideslope 18 downslope

- cover depth of 12-18"+ VERIFY
- 3 laterals (1-2' from edge of rock)
- 1.50 inch pipe size (Sch40 pipe & fittings)
- 3.0 ft lateral spacing

- 1/4" inch perforations
- 3.0 ft perforation spacing



- Air inlet at end of laterals, and at top feed manifold if necessary. VERIFY
- clean outs (no hard 90's)
- 4" inspection pipe to bottom of rock, anchored VERIFY

- Abandon existing system - if necessary _____ Re-use existing tank certification
- monitoring plan and type _____
- well abandonment form - if necessary _____

System Elevations

Elv. = 100' benchmark Nail on East Meter Post



(Grade elevations are existing. If a different final grade is desired it should be shown and described here.)

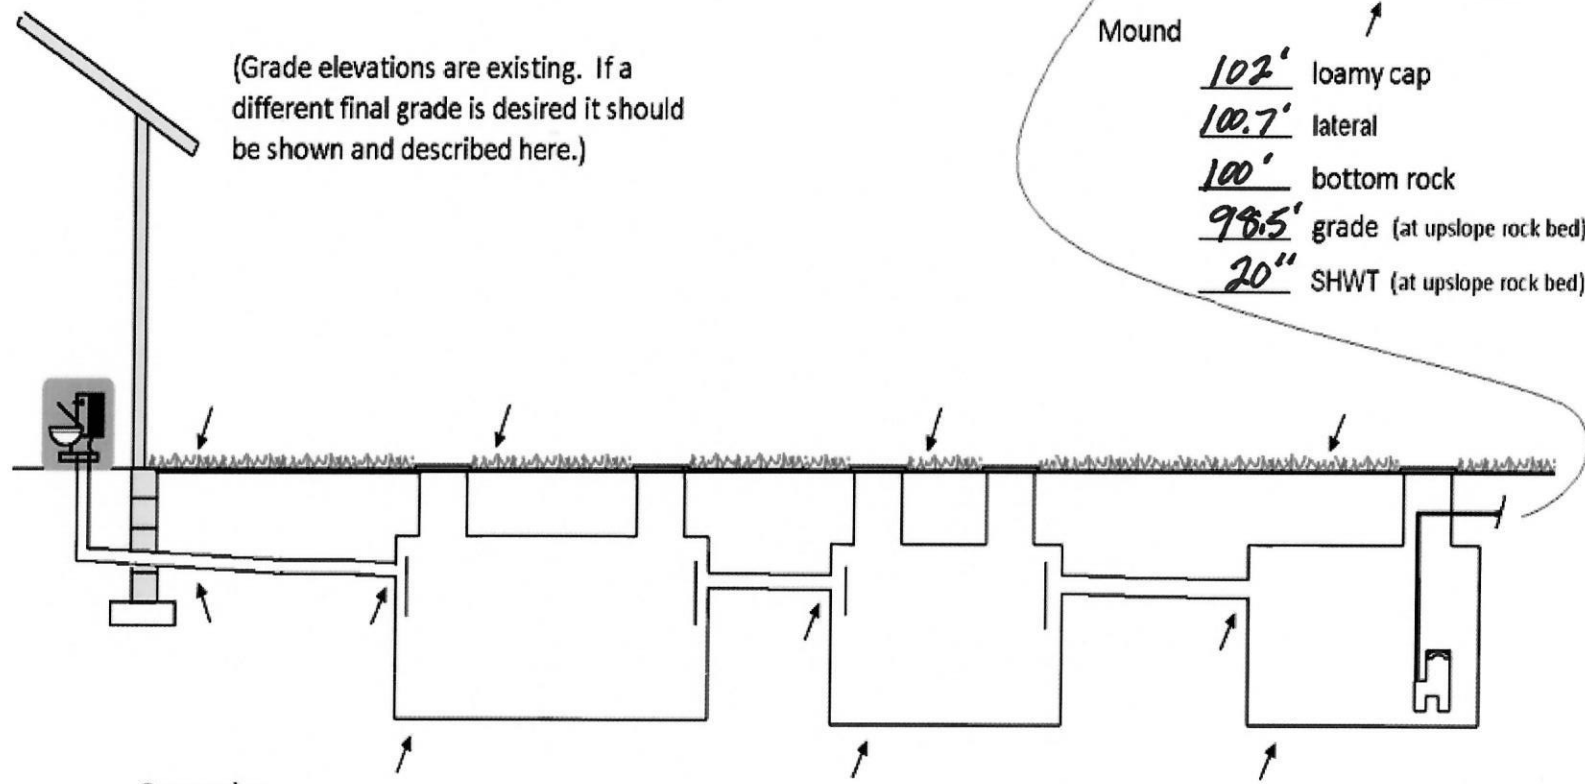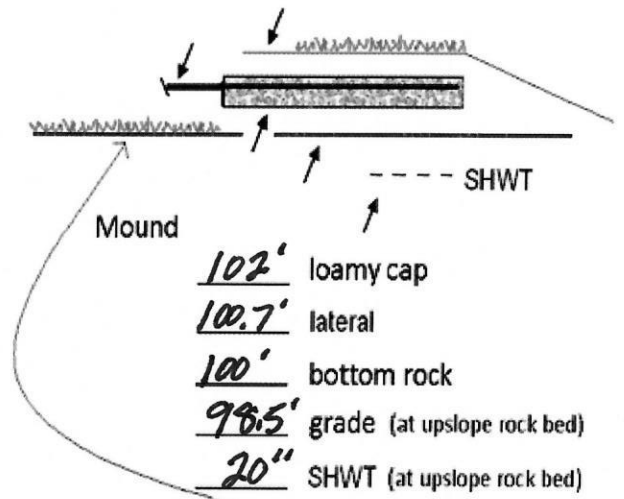

	Sewer pipe exiting house	Septic Tank	Septic Tank (if applicable)	Pump Tank
Shop approx	<u>100.1'</u> Grade	<u>97.9'</u> Grade	_____ Grade	<u>97.9'</u> Grade
	<u>98'</u> Pipe	<u>96.5'</u> inlet	_____ inlet	<u>96.3'</u> inlet
		<u>92.5'</u> Tank bottom	_____ Tank bottom	<u>92.5'</u> Tank bottom

{ Design Drawing }

Property Owner: Steve Smith Date: 10/3/18 Designer's Initials: JB
 Parcel ID. Number: 07-0-045001 Address: 41714 Diamond Lake St. Aitkin MN 56431
 one Inch = 40ft.

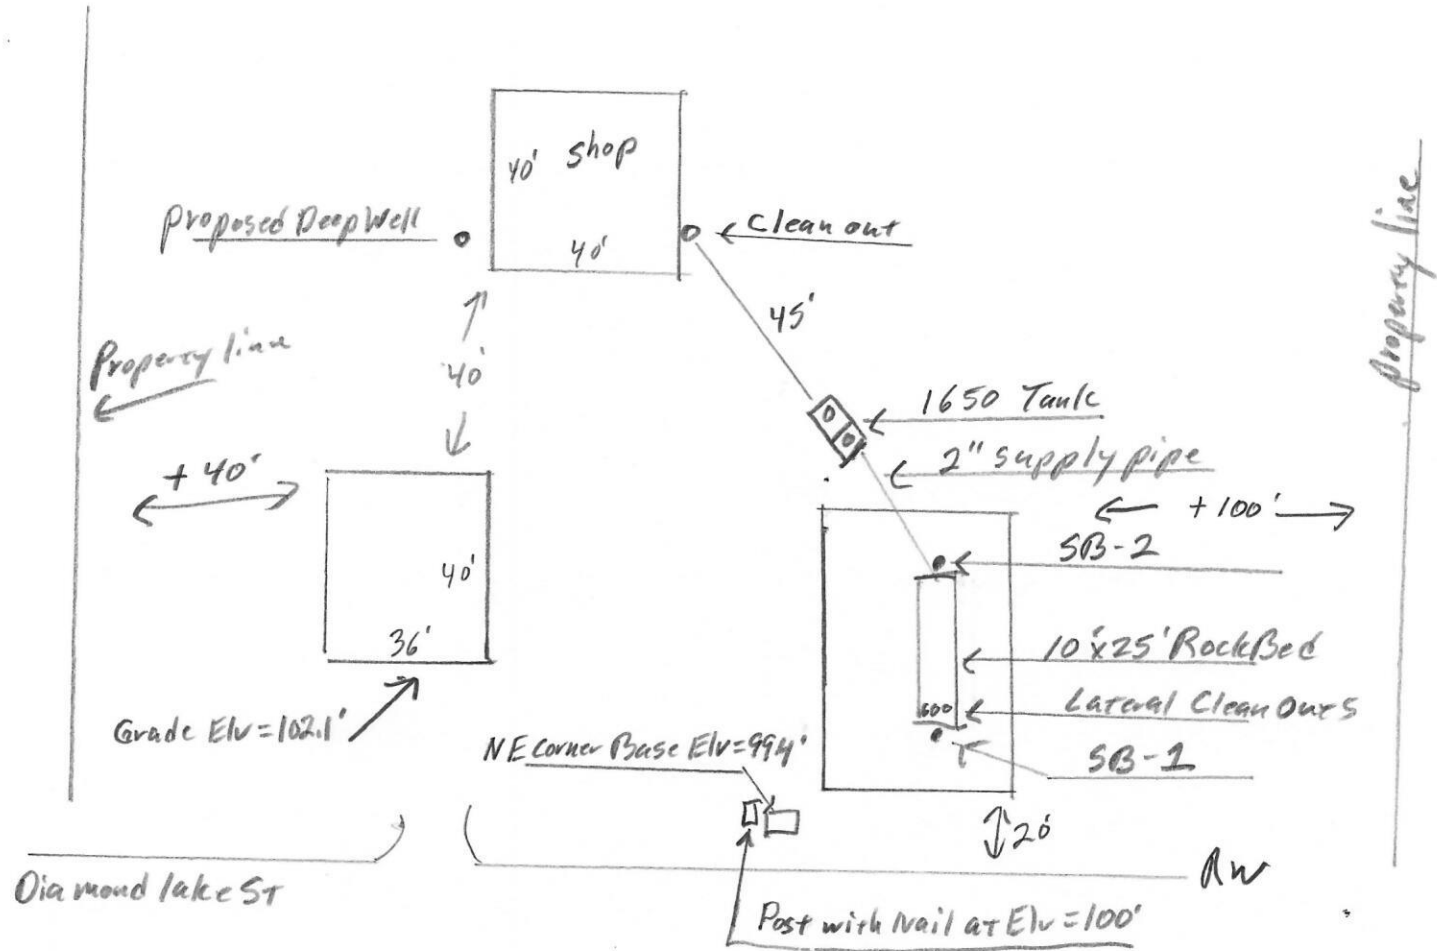

Bench Mark Nail on East post for power meter box. Elv. = 100'

Surface/ SHWT		Nail on Post = Bench Mark 100'		Existing Grade	
Soil Bore 1	98.1' / 36"	Bench Mark	100'	Upslope Edge of Rockbed Elv. = 98.5'	
Soil Bore 2	98.1' / 20"	Ground Elv. BM	99.5'	Bottom of Rockbed Elv. = 100'	
Soil Bore 3		Ground Elv. Tank	97.9'	Top of Washed sand Elv. = 100'	
	Ground at	Proposed shop	100.1' Approx.	Existing shed grade Elv. = 102.1'	

Please show all that apply (Existing)

Please Draw to Scale with North to Top or Left Side of Page:

- Wells within 100ft. Of Drain field.
- Water lines within 10 ft. of Drain field.
- Drain field Areas:

Disturbed/Compacted Areas	Access Route for Tank Maintenance
Component Location	Property Lines
OHW ordinary high water	Structures
Lot Easements	Setbacks

Mound Design Notes - Aitkin county

Property Owner: Steve Smith

Date: 10/3/18

Site Address: 41714 Diamond Lake St. Aitkin MN 56431

PID: 07-0-045001

Comments: **Mound design may not follow Aitkin co. Auto fill form for mound design.**

- 1 This is a type I mound for a 2 bedroom Sizing for shop. Proposed deep well location will be North of Shop. There are no wells on property or within 100 ft. of mound location.
NW corner of power transformer base at Elv. = 99.4'
- 2 Bench Mark is a nail on the East post for the power meter box. Elevation = 100'
- 3 Install cleanout near dwelling.
- 4 Install Jacobson 1650 Compartment tank for gravity flow from proposed shop (Elv. not set)
- 5 Elevation contour of rock bed upslope edge is 98.5'.
The area size of the rock bed is 10' x 25' . Absorption area is 25' x 31.6'.
Sand absorption area is 8.1 ft. up slope + 10 ft. rockbed + 13.5 downslope = approx. 31.6 ft. wide sand base.
Berms are 11ft. Upslope, 18ft. Down slope, 10ft. Rock bed = approx. 39ft. Wide. End berms are 16 ft. wide.
Overall mound size is approx. 39' wide x 57' long and approx. 3.5' high.
- 6 The bench mark is the nail on the post East of mound area, BM = Elv. 100'.
Installer to double check bench mark. Installer should confirm bench mark and sand height Elv. with inspector.
Installer should record bench mark Elv. and sand height on installation inspection form.
- 7 The top of the washed sand and bottom of rock bed is Elv. 100'.
It is important that the soils do not get compacted, and that clean washed sand is used.
- 8 The Jacobson 1650 compartment tank will be gravity flow from dwelling. Install the pump for 7 demand doses per day. approx. 50 gallons per dose, 3.9 inches of tank level. Install alarm at 3 inches from pump on level.
Install all manholes, inspection pipes and clean-outs to grade or above, insulate top of tank.
- 9 Install Effluent filter on septic tank outlet, install electric alarm on filter.
Install a 2" supply pipe from tank to end manifold in rock bed, install so pipe drains back to tank.
Install 1.5" laterals with 9" of rock under them. Install clean-outs at far end of laterals.
Drill 1/4" holes for Perf sizing, 36" on centers.
Install inspection pipe to bottom of rock bed, secure in rock bed and raise to above final grade.
- 10 Installer will pressure test and squirt height laterals when finished.

Designed to Aitkin Co. and MPCA recommendations and requirements.





Designer Signature

Brummer Septic LLC.
Design Company

L-1347
License#

1650 Gallon 2 Compartment Septic Tank

TOP VIEW

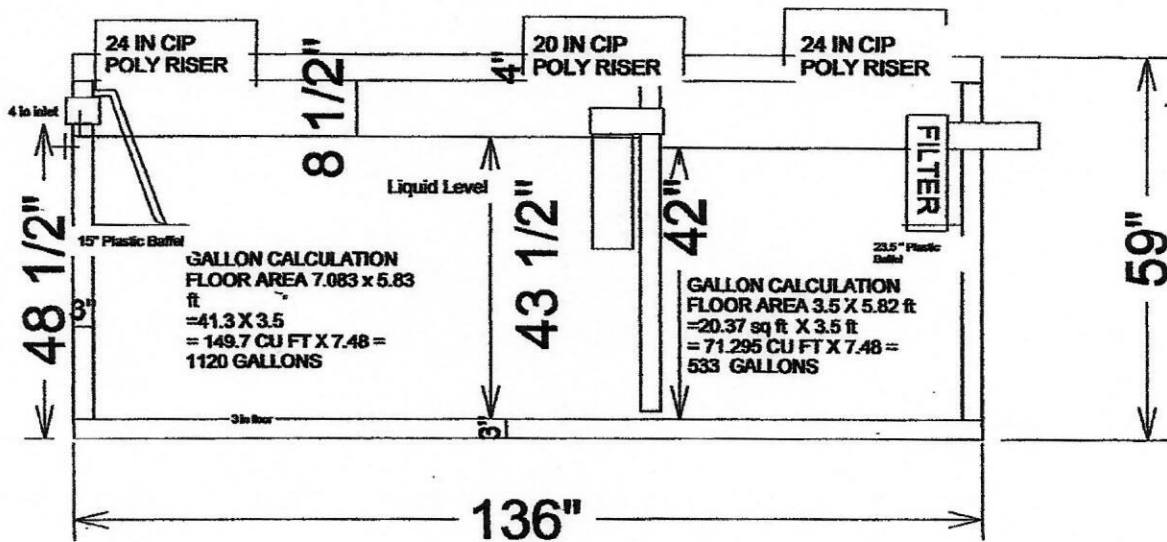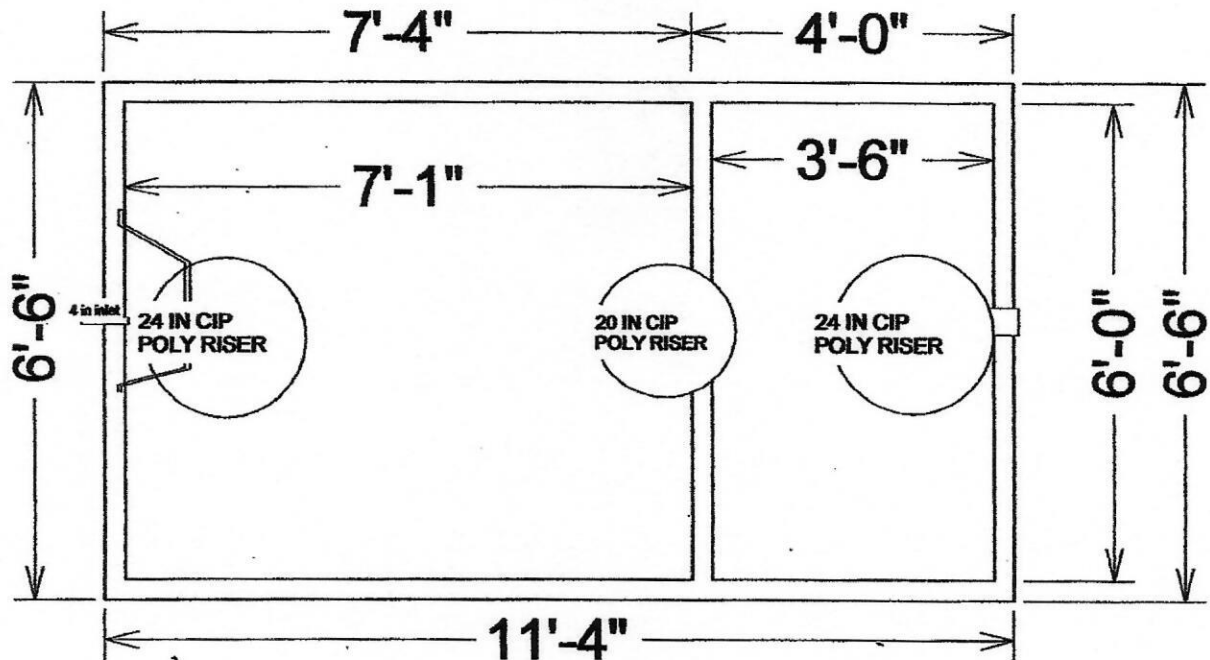

$533 / 42" = 12.69 \text{ GPI}$

SIDE VIEW

Drawings Owned BY Jacobson Precast, Inc.
36641 HWY 169, Aitkin, Mn 56431



Detailed Parcel Report

Parcel Number: 07-0-045001

General Information

Township/City: FARM ISLAND TWP
 Taxpayer Name: SMITH, STEVE E
 Taxpayer Address: 11001 SUMPTER AVENUE N
 CHAMPLIN MN 55316
 Property Address: 41714 DIAMOND LAKE ST
 Township: 46 Lake Number: 0
 Range: 27 Lake Name:
 Section: 23 Acres: 10.00
 Green Acres: No School District: 1.00
 Plat:
 Brief Legal Description: S 1/2 OF S 1/2 OF S 1/2 OF NW 1/4 LYING E OF ZISKE ROAD

Tax Information

Class Code 1: Non-Comm Seasonal Residential Recreational
 Class Code 2: Unclassified
 Class Code 3: Unclassified
 Homestead: Non Homestead
 Assessment Year: 2018


Estimated Land Value:	\$33,500.00
Estimated Building Value:	\$8,000.00
Estimated Total Value:	<u>\$41,500.00</u>
Prior Year Total Taxable Value:	\$39,700.00
Current Year Net Tax (Specials Not Included):	\$286.00
Total Special Assessments:	\$0.00
**Current Year Balance Not Including Penalty:	\$0.00
Delinquent Taxes:	No

* For more information on delinquent taxes, please call the Aitkin County Treasurer's Office at 218-927-7325.

** Balance Due on a parcel does not include late payment penalties.

Aitkin County

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Zoom In	Zoom Out	Pan	Zoom Prev	Zoom Next	Zoom Select	Zoom Extent	Clear	Search	Identify	Legend	Results	Buffer	X/Y	Map
Navigation						Commands			View					

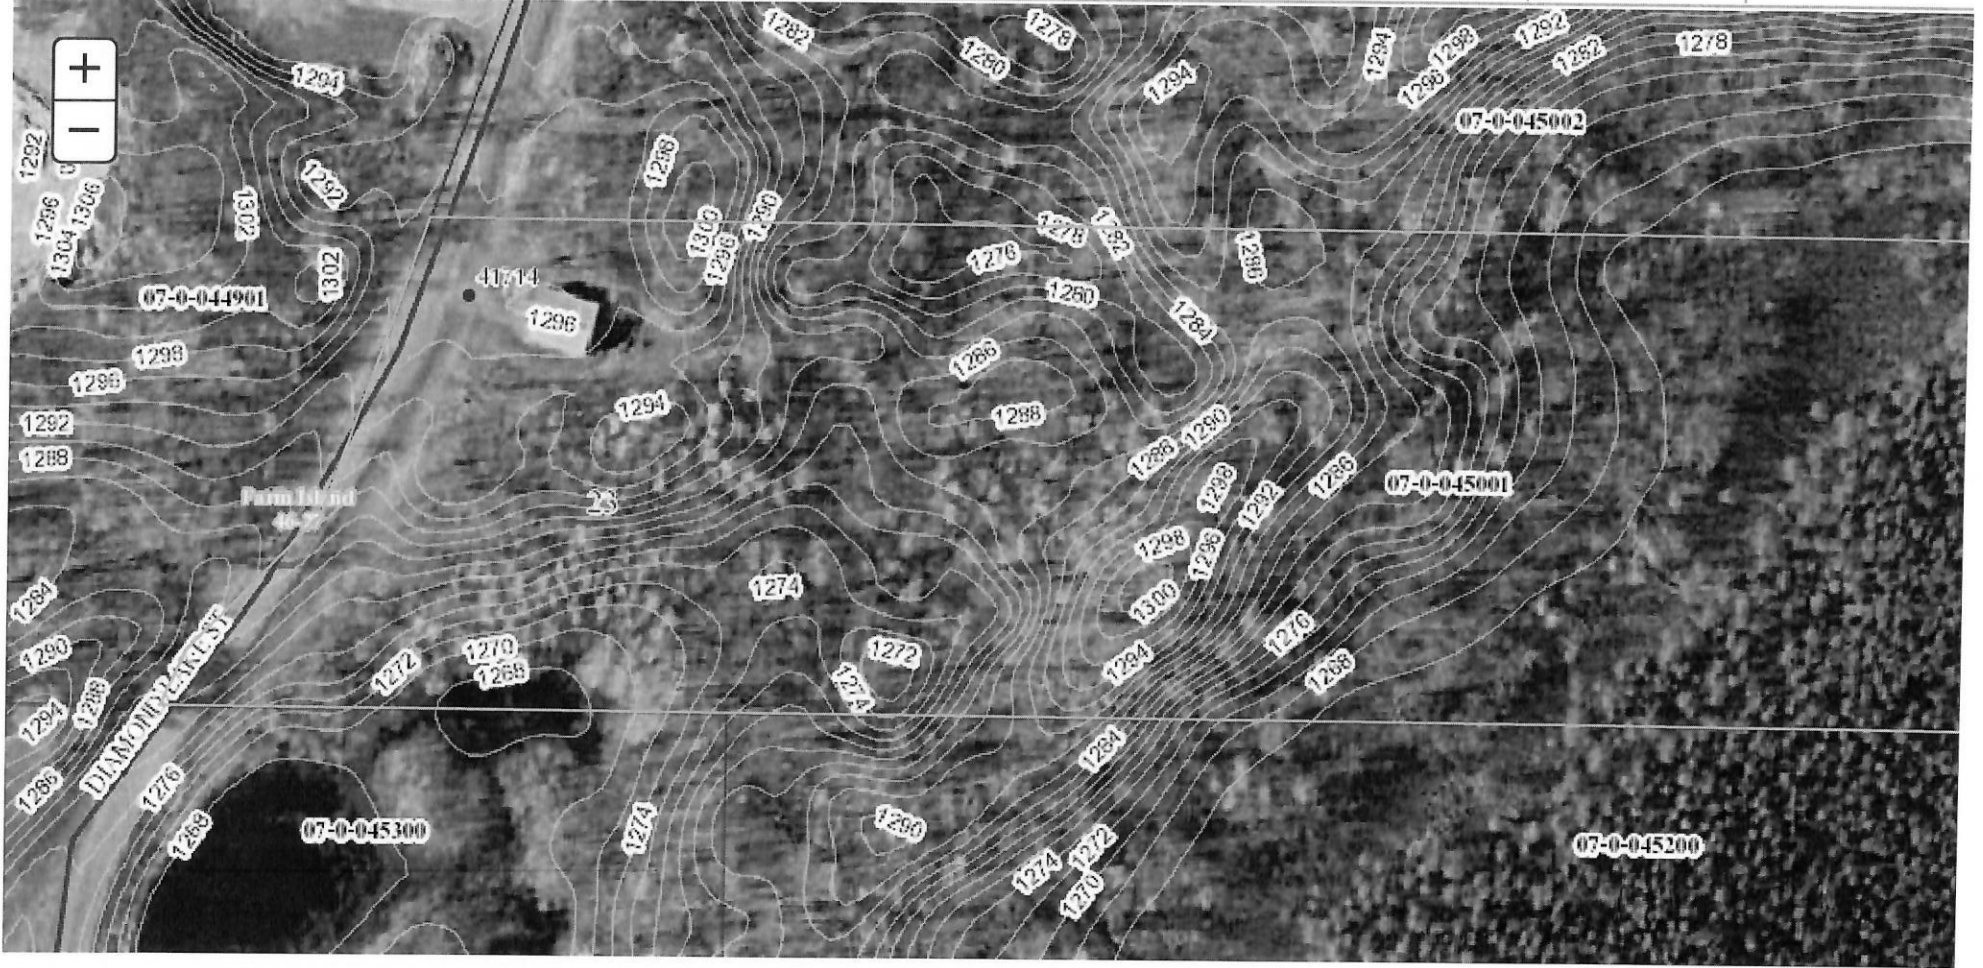

Scale 1: 2257

No Tool Active



[Contact Us](#) |
 [Subscribe](#) |
 [Archived Soil Surveys](#) |
 [Soil Survey Status](#) |
 [Glossary](#) |
 [Preferences](#) |
 [Link](#) |
 [Logout](#) |
 [Help](#)

[A](#) |
 [A](#) |
 [A](#)

[Area of Interest \(AOI\)](#) |
 [Soil Map](#) |
 [Soil Data Explorer](#) |
 [Download Soils Data](#) |
 [Shopping Cart \(Free\)](#)

[Printable Version](#) |
 [Add to Shopping Cart](#)

Search

Map Unit Legend


Aitkin County, Minnesota (MN001)

Aitkin County, Minnesota (MN001)

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
268E	Cromwell fine sandy loam, 12 to 25 percent slopes	3.5	35.2%
533	Loxley peat	0.4	3.8%
928C	Cushing-Mahtomedi complex, 2 to 10 percent slopes	3.5	35.3%
928D	Cushing-Mahtomedi complex, 10 to 25 percent slopes	2.6	25.7%
Totals for Area of Interest		10.0	100.0%

Soil Map

Scale (not to scale)

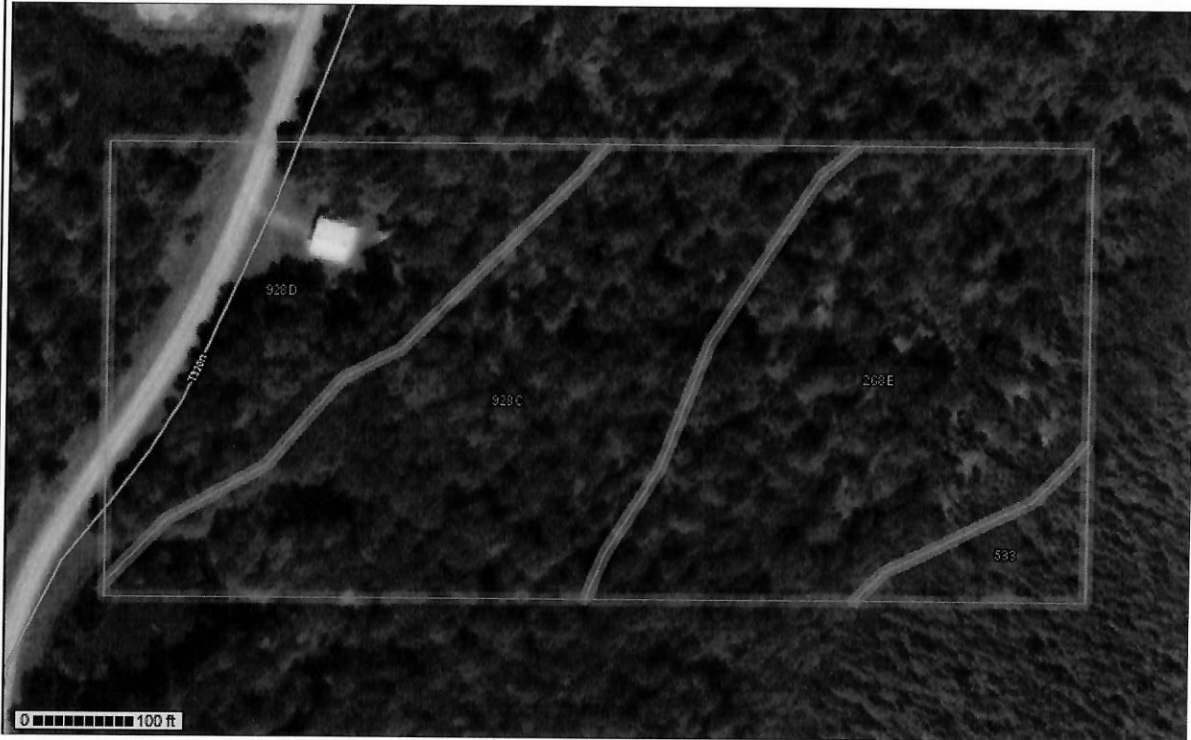

Warning: Soil Map may not be valid at this scale.

You have zoomed in beyond the scale at which the soil map for this area is intended to be used. Mapping of soils is done at a particular scale. The soil surveys that comprise your AOI were mapped at 1:20,000. The design of map units and the level of detail shown in the resulting soil map are dependent on that map scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

[FOIA](#) |
 [Accessibility Statement](#) |
 [Privacy Policy](#) |
 [Non-Discrimination Statement](#) |
 [Information Quality](#) |
 [USA.gov](#) |
 [White House](#)

Aitkin County, Minnesota

928D—Cushing-Mahtomedi complex, 10 to 25 percent slopes

Map Unit Setting

National map unit symbol: gjk5
Elevation: 980 to 1,640 feet
Mean annual precipitation: 25 to 30 inches
Mean annual air temperature: 39 to 45 degrees F
Frost-free period: 120 to 140 days
Farmland classification: Not prime farmland

Map Unit Composition

Cushing and similar soils: 45 percent
Mahtomedi and similar soils: 40 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Cushing

Setting

Landform: Moraines
Landform position (two-dimensional): Shoulder, backslope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Loamy till

Typical profile

E - 0 to 7 inches: loam
B/E - 7 to 17 inches: loam
Bt - 17 to 30 inches: loam
C - 30 to 60 inches: loam

Properties and qualities

Slope: 10 to 25 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Well drained
Capacity of the most limiting layer to transmit water (Ksat):
Moderately high (0.20 to 0.60 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum in profile: 10 percent
Available water storage in profile: High (about 9.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 4e
Hydrologic Soil Group: C
Forage suitability group: Sloping; Fine Texture (G090AN023MN)
Hydric soil rating: No

Description of Mahtomedi

Setting

Landform: Moraines
Landform position (two-dimensional): Shoulder, backslope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Sandy and gravelly outwash

Typical profile

A - 0 to 3 inches: loamy coarse sand
E - 3 to 13 inches: coarse sand
Bw - 13 to 25 inches: gravelly coarse sand
C - 25 to 60 inches: gravelly sand

Properties and qualities

Slope: 10 to 25 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Excessively drained
Capacity of the most limiting layer to transmit water (Ksat): High to very high (6.00 to 20.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum in profile: 15 percent
Available water storage in profile: Low (about 4.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 6s
Hydrologic Soil Group: A
Forage suitability group: Sandy (G090AN022MN)
Hydric soil rating: No

Minor Components

Alstad and similar soils

Percent of map unit: 8 percent
Hydric soil rating: No

Cathro and similar soils

Percent of map unit: 7 percent
Landform: Bogs
Hydric soil rating: Yes

Data Source Information

Soil Survey Area: Aitkin County, Minnesota
Survey Area Data: Version 18, Oct 4, 2017

Aitkin County, Minnesota

928C—Cushing-Mahtomedi complex, 2 to 10 percent slopes

Map Unit Setting

National map unit symbol: gjk4
Elevation: 980 to 1,640 feet
Mean annual precipitation: 25 to 30 inches
Mean annual air temperature: 39 to 45 degrees F
Frost-free period: 120 to 140 days
Farmland classification: Not prime farmland

Map Unit Composition

Cushing and similar soils: 50 percent
Mahtomedi and similar soils: 35 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Cushing

Setting

Landform: Moraines
Landform position (two-dimensional): Backslope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Loamy till

Typical profile

E - 0 to 16 inches: very fine sandy loam
B/E - 16 to 19 inches: loam
Bt - 19 to 44 inches: loam
C - 44 to 60 inches: loam

Properties and qualities

Slope: 2 to 10 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Well drained
Capacity of the most limiting layer to transmit water (Ksat):
Moderately high (0.20 to 0.60 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum in profile: 10 percent
Available water storage in profile: High (about 9.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 3e
Hydrologic Soil Group: B
Forage suitability group: Sloping Upland, Acid (G090AN006MN)
Hydric soil rating: No

Description of Mahtomedi

Setting

Landform: Moraines
Landform position (two-dimensional): Backslope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Sandy and gravelly outwash

Typical profile

A - 0 to 4 inches: loamy sand
E - 4 to 15 inches: coarse sand
Bw - 15 to 26 inches: gravelly coarse sand
C - 26 to 60 inches: gravelly sand

Properties and qualities

Slope: 2 to 10 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Excessively drained
Capacity of the most limiting layer to transmit water (Ksat): High to very high (6.00 to 20.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum in profile: 15 percent
Available water storage in profile: Low (about 4.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 6s
Hydrologic Soil Group: A
Forage suitability group: Sandy (G090AN022MN)
Hydric soil rating: No

Minor Components

Sandwich and similar soils

Percent of map unit: 4 percent
Landform: Flats
Hydric soil rating: Yes

Meehan and similar soils

Percent of map unit: 4 percent
Hydric soil rating: No

Cathro and similar soils

Percent of map unit: 4 percent
Landform: Bogs
Hydric soil rating: Yes

Alstad and similar soils

Percent of map unit: 3 percent

Hydric soil rating: No

Data Source Information

Soil Survey Area: Aitkin County, Minnesota
Survey Area Data: Version 18, Oct 4, 2017

Aitkin County, Minnesota

268E—Cromwell fine sandy loam, 12 to 25 percent slopes

Map Unit Setting

National map unit symbol: gjgg
Elevation: 980 to 1,640 feet
Mean annual precipitation: 25 to 30 inches
Mean annual air temperature: 39 to 45 degrees F
Frost-free period: 120 to 140 days
Farmland classification: Not prime farmland

Map Unit Composition

Cromwell and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Cromwell

Setting

Landform: Outwash plains
Landform position (two-dimensional): Shoulder, backslope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Sandy outwash

Typical profile

A - 0 to 2 inches: fine sandy loam
Bw,2Bw,2C - 2 to 60 inches: gravelly sand

Properties and qualities

Slope: 12 to 25 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Somewhat excessively drained
Capacity of the most limiting layer to transmit water (Ksat):
Moderately high to high (0.60 to 2.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water storage in profile: Low (about 3.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 6e
Hydrologic Soil Group: B
Forage suitability group: Steep; Coarse Texture; Low AWC
(G090AN018MN)
Hydric soil rating: No

Minor Components

Oesterle and similar soils

Percent of map unit: 8 percent

Hydric soil rating: No

Leafriver and similar soils

Percent of map unit: 7 percent

Landform: Depressions

Hydric soil rating: Yes

Data Source Information

Soil Survey Area: Aitkin County, Minnesota

Survey Area Data: Version 18, Oct 4, 2017